

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
4 April 2002 (04.04.2002)

PCT

(10) International Publication Number  
**WO 02/27804 A2**

(51) International Patent Classification<sup>7</sup>: **H01L 31/00**

(21) International Application Number: PCT/US01/29488

(22) International Filing Date:  
20 September 2001 (20.09.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/235,249 25 September 2000 (25.09.2000) US  
09/884,863 18 June 2001 (18.06.2001) US

(71) Applicant: **FOVEON, INC.** [US/US]; 2820 San Tomas Expressway, Santa Clara, CA 95051-0951 (US).

(72) Inventor: **MERRILL, Richard, B.**; 890 Patrol Road, Woodside, CA 95134 (US).

(74) Agents: **D'ALESSANDRO, Kenneth et al.**; Sierra Patent Group, Ltd., P.O. Box 6149, Stateline, NV 89449 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: VERTICAL COLOR FILTER DETECTOR GROUP AND ARRAY

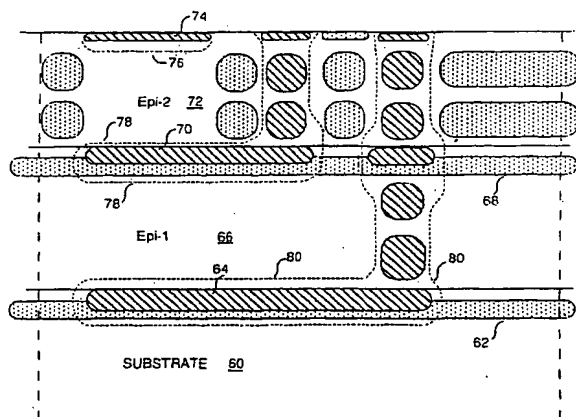

(57) Abstract: A vertical color filter detector group according to the present invention is formed on a semiconductor substrate and comprises at least six layers of alternating p-type and n-typed doped regions. PN junctions between the layers operate as photodiodes with spectral sensitivities that depend on the absorption depth versus wavelength of light in the semiconductor. Alternate layers, preferably the n-type layers, are detector layers to collect photo-generated carriers, while the intervening layers, preferably p-type, are reference layers and are connected in common to a reference potential referred to as ground. Each detector group includes a blue-sensitive detector layer at an n-type layer at the surface of the semiconductor, a green-sensitive detector layer at an n-type layer deeper in the semiconductor, and a red-sensitive detector layer at the n-type layer deepest in the semiconductor. The blue-sensitive detector layer at the surface of the semiconductor may have a reference layer only below it, while the red- and green-sensitive detector layers have reference layers above and below them. Three sets of active pixel sensor circuitry are coupled to the three detector layers, such that three active pixel sensors are formed using the group of three co-located detectors of the vertical color filter detector group.

WO 02/27804 A2

5

## SPECIFICATION

### VERTICAL COLOR FILTER DETECTOR GROUP AND ARRAY

10

#### PRIORITY

This application claims benefit of United States Provisional Patent Application Serial No. 60/235,249, filed September 25, 2000.

15

#### BACKGROUND OF THE INVENTION

##### 1. Field of the Invention

The present invention relates to active pixel sensors. More particularly, the present invention relates to full-color detector groups and arrays that use semiconductor material to chromatically filter light vertically and sense multiple wavelength bands at the same location.

20

##### 2. The Prior Art

MOS active pixel sensors are known in the art. Multiple wavelength active pixel sensors are also known in the art. One type of multiple wavelength active pixel sensor employs red, green, and blue sensors disposed horizontally in a pattern at or near the semiconductor surface. Color overlay filters are employed to produce the color selectivity between the red, green, and blue sensors. Such sensors have the disadvantage of occupying a relatively large area per pixel as these sensors are tiled together in a plane.

25

Another type of multiple wavelength vertical pixel sensor employs more than one sensor in a vertically-oriented arrangement. An example of an early multiple wavelength vertical pixel sensor for detecting visible and infra-red radiation is disclosed in United States Patent No. 4,238,760 to Carr, in which a first diode in a surface n-type epitaxial region is responsive to visible light and a second buried region in an underlying n-type substrate is responsive to infrared radiation. Contact to the buried photodiode is made using deep diffusion processes similar to diffusion-under-film collector contact diffusion common in bipolar IC processing and for  $R_{CS}$  reduction. The disclosed device has a size of 4 mils square.

30

35

- 5 An alternate embodiment employs V-groove MOS transistors to contact the buried p-type region of the infra-red diode.

The device disclosed in the Carr patent has several shortcomings, the most notable being its large area, rendering it unsuitable for the image sensor density requirements of modern imaging systems. The technology employed for contact formation to the buried  
10 infrared sensing diode is not suitable for modern imaging technology or extension to a 3-color sensor.

A particular example of a three-color visible-light prior art vertical pixel sensor group is disclosed in United States Patent No. 5,965,875 to Merrill in which a structure is provided using a triple-well CMOS process wherein the blue, green, and red sensitive PN  
15 junctions are disposed at different depths beneath the surface of the semiconductor substrate upon which the imager is fabricated.

This prior three-color sensor group permits fabrication of a dense imaging array because the three colors are sensed over approximately the same area in the image plane. However, this structure has several shortcomings. First, this pixel sensor group uses a  
20 reverse-polarity central green-sensitive PN junction, requiring modified circuits or voltage ranges, possibly involving PMOS transistors in addition to the usual NMOS transistors, to sense and read out the green channel. This requirement disadvantageously increases sensor area and complicates support circuits in the array.

Furthermore, an imaging array fabricated using the technology in the Merrill patent  
25 requires use of an annular n-well isolation ring within the sensor group pixel area. Such isolation rings consume a large amount of pixel area in the array.

In addition, the junction depths of the three photodiodes are not optimally matched to the absorption depths of the blue, green, and red photons, resulting in inappropriate filter crossover points and poor green filter selectivity.

30 Finally, the three photodiodes interact with each other. The net result is potential image lag or a requirement for additional control circuitry.

## BRIEF DESCRIPTION OF THE INVENTION

A vertical color filter detector group according to the present invention is formed on  
35 a semiconductor substrate and comprises a plurality of detector layers configured by doping and/or biasing to collect photo-generated carriers of a first polarity, preferably negative

5 electrons, separated by additional intervening reference layers configured to collect and conduct away photo-generated carriers of the opposite polarity, preferably positive holes.

The detector layers have different spectral sensitivities based on their different depths in the semiconductor substrate, doping levels and biasing conditions. The detector layers are individually connected to active pixel sensor readout circuits. In one example of such a  
10 detector group, each detector group includes a blue photodetector n-type layer at the surface of the semiconductor, a green photodetector n-type layer deeper in the semiconductor, and a red photodetector n-type layer deepest in the semiconductor. The blue photodetector at the surface of the semiconductor may optionally have a reference layer only below it, while the red and green photodetectors have reference layers above and below their detector layers.

15 Three sets of active pixel sensor circuitry are coupled to the three detector layers, such that three active pixel sensors are formed using the group of three co-located photodetectors of the vertical color filter detector group.

According to one example, a vertical color filter detector group is formed on a semiconductor substrate and comprises at least six layers of alternating p-type and n-typed  
20 doped regions, one of which can be the substrate itself. PN junctions between the layers operate as photodiodes with spectral sensitivities that depend on the absorption depth versus wavelength of light in the semiconductor. Alternate layers, preferably the n-type (but could be p-type) layers, are detector layers to collect photo-generated carriers, while the intervening layers, preferably p-type (but could be n-type), are reference layers and are  
25 connected in common to a reference potential referred to as ground. In an embodiment where the detector layers are n-type layers, each detector group includes a blue photodetector n-type layer at the surface of the semiconductor, a green photodetector n-type layer deeper in the semiconductor, and a red photodetector n-type layer deepest in the semiconductor. The blue photodetector layer at the surface of the semiconductor may  
30 optionally have a reference layer only below it, while the red and green photodetector layers have reference layers above and below their detector layers. Three sets of active pixel sensor circuitry are coupled to the three detector layers, such that three active pixel sensors are formed using the group of three co-located photodetectors of the vertical color filter detector group. From this disclosure, persons of ordinary skill in the art will  
35 recognize that structures are contemplated herein in which other layers, (i.e., intrinsic layers) are disposed between the at least six layers.

5 According to another aspect of the present invention, a process is disclosed for fabricating the vertical color filter pixel sensor of the present invention.

#### BRIEF DESCRIPTION OF THE DRAWING FIGURES

10 FIG. 1 is a cross-sectional view of a prior-art three-color vertical color filter pixel sensor.

FIG. 2A is a combination semiconductor cross sectional diagram and schematic diagram of a vertical color filter pixel sensor according to the present invention.

15 FIG. 2B is a combination semiconductor cross sectional diagram and schematic diagram depicting the same vertical color filter pixel sensor as shown in FIG. 2A in which the photodiodes are represented schematically as semiconductor diode symbols.

FIG. 2C is a schematic diagram depicting transistor circuitry that may be used in a storage version of the vertical color filter pixel of the present invention to which each of the red, green, and blue photodiodes is coupled.

20 FIG. 3 is semiconductor cross sectional diagram illustrating a vertical color filter pixel sensor employing epitaxial semiconductor technology.

FIGS. 4A through 4E are cross-sectional diagrams showing the structure resulting after completion of selected steps in the fabrication process.

FIG. 5 is a diagram of an imaging array according to the present invention.

25 FIGS. 6A and 6B are timing diagrams that illustrate the operation of the pixel sensor of FIGS. 2A, 2B, and the array of FIG. 5.

#### DETAILED DESCRIPTION OF THE INVENTION

30 Persons of ordinary skill in the art will realize that the following description of the present invention is illustrative only and not in any way limiting. Other embodiments of the invention will readily suggest themselves to such skilled persons having the benefit of this disclosure.

35 The vertical color filter detector group of the present invention solves the problems of the prior art at the expense of additional front-end process steps, including epitaxial depositions. The photodiode type described herein will allow a 7  $\mu\text{m}$  x 7  $\mu\text{m}$  pixel with 50% utilization using a circa 2000 0.18  $\mu\text{m}$  process.

5 Referring first to FIG. 1, a cross-sectional view shows a prior-art vertical color filter detector group 10 of the type disclosed in United States Patent No. 5,965,875 to Merrill. FIG. 1 shows a vertical color filter detector group structure fabricated in a triple-well process wherein the blue, green, and red sensors are disposed at different depths beneath the surface of the semiconductor substrate 12 upon which the imager is fabricated.

10 As may be seen from an examination of FIG. 1, the red photodiode is comprised of the junction between the p-type substrate and the n-type well 14, the green photodiode is comprised of the junction between the n-type well 14 and the p-type well 16, and the blue photodiode is comprised of the junction between the p-type well 16 and the n-type lightly-doped-drain implant 18 at the surface of the substrate. Photocurrent is sensed from the

15 red, green, and blue photodiodes as indicated symbolically by current meters 20, 22, and 24, respectively.

As will be appreciated by persons of ordinary skill in the art, the photodiodes in the vertical color filter pixel sensor of FIG. 1 are connected directly to one another in series and are thus of alternating polarity. This photodiode structure complicates the transistor

20 circuitry with which it is used.

Referring now to FIG. 2A, a vertical color filter detector group 30 according to an illustrative embodiment of the present invention is a six-layer structure that is shown schematically in cross-sectional view fabricated on p-type semiconductor substrate 32. This type of vertical color filter detector group has three n-type photodiodes, isolated

25 vertically by p-regions that are all connected to substrate potential. The vertical color filter detector group of the present invention can be fabricated in a number of different ways and is thus shown very generally in FIG. 2A.

The vertical color filter detector group depicted in FIG. 2A employs a six-layer structure wherein the blue, green, and red photodiode sensors are disposed at different

30 depths beneath the surface of the semiconductor structure. Unlike the vertical color filter pixel sensor of FIG. 1, the addition of the extra layers results in a structure in which the red, green, and blue photocurrent signals are all taken from the n-type cathodes of three isolated photodiodes. This is shown schematically in FIG. 2B, depicting the same vertical color filter detector group as shown in FIG. 2A in which the photodiodes are represented

35 schematically as semiconductor diode symbols.

5 Examining the structure of FIG. 2A in more detail, n-type region 34 lies above p-type region 32, which may be the semiconductor substrate or may be another p-type region in the semiconductor structure. The red photodiode has p-type regions 32 and 36 as its anode and n-type region 34 as its cathode. The output of the red photodiode is a contact from n-type region 34. The p-type region 32 is coupled to a fixed potential such as ground.

10 A p-type region 36 is disposed above n-type region 34, and an n-type region 38 is disposed above p-type region 36. The green photodiode has p-type regions 36 and 40 as its anode and n-type region 38 as its cathode. The output of the green photodiode is a contact from n-type region 38. The p-type region 36 is coupled to the same fixed potential as substrate 32 and, as will be appreciated by persons of ordinary skill in the art, is another  
15 anode for the red sensor.

A p-type region 40 is disposed above n-type region 38, and an n-type region 42 is disposed above p-type region 40. The blue photodiode has p-type region 40 as its anode and n-type region 42 as its cathode. The output of the blue photodiode is a contact from n-type region 42. The p-type region 40 is coupled to the same fixed potential as substrate 32  
20 and, as will be appreciated by persons of ordinary skill in the art, is another anode for the green sensor.

Persons of ordinary skill in the art will observe that all of the red, green, and blue photodiodes (indicated at reference numerals 44, 46, and 48, respectively, in FIG. 2B) are operated in reverse bias. In FIG 2B, each of these photodiodes is shown having its p-type  
25 region anode coupled to ground. Such skilled persons will also observe that upside down diodes 50 and 52 are formed in series between each of the red, green, and blue photodiodes and serve as additional reverse-bias-operated photodiodes. Thus, a diode 50 has p-type region 36 as its anode and n-type region 34 as its cathode. A diode 52 has p-type region 40 as its anode and n-type region 38 as its cathode. Because of this structure  
30 and resulting alternating polarity diodes, the outputs of the blue, green, and red photodiodes are identical in polarity and can easily drive identical transistor circuits in the vertical color filter detector group without any of the drawbacks of the prior-art vertical color filter pixel sensors, such as the one depicted in FIG. 1.

Both FIGS. 2A and 2B show a non-storage version of the vertical color filter pixel  
35 of the present invention in which each of the red, green, and blue photodiodes is coupled to a transistor circuit. Each circuit has a reset transistor 54 driven from a RESET signal

5 line and coupled between the photodiode cathode and a reset potential, a source-follower amplifier transistor 56 coupled to the photodiode cathode, and a row-select transistor 58 driven from a ROW-SELECT signal line and coupled between the source of the source follower amplifier transistor and a row line. The suffixes "r", "g", and "b" are used to denote the color associated with each transistor in FIGS. 2A and 2B. As is known in the art, the RESET signal is active to reset the pixel and is then inactive during exposure, after  
10 which the row select line is activated to read out the pixel data.

Referring now to FIG. 2C, a schematic diagram depicts transistor circuitry that may be used in a storage version of the vertical color filter pixel of the present invention to which each of the red, green, and blue photodiodes is coupled. As will be appreciated by  
15 persons of ordinary skill in the art, the transistor circuit of FIG. 2C includes an additional transfer transistor 59 not found in the circuits of FIGS. 2A and 2B. The gate of transfer transistor 59 is coupled to a XFR line that is held active for at least part of the time that the RESET line is active and goes inactive at the end of the exposure time, after which the row select line is activated to read out the pixel data. One advantage of the circuit of FIG. 2C is  
20 that the use of the transfer transistors eliminates the need for a mechanical shutter.

Another difference in the schematic diagram of FIG. 2C is that the drains of Amplifier transistors 56b, 56g, and 56r are source follower transistors connected to a VSFD line instead of to Vcc. The voltage potential VSFD may be held fixed at a supply voltage V+ (which may be, for example, about 1-3 volts depending on the technology) or  
25 may be pulsed.

To increase the input-to-output voltage gain of source follower transistors 56b, 56g, and 56r, it is possible to pulse their drain terminals. If the VSFD signal at the drains of the source follower transistors 56b, 56g, and 56 is pulsed, current will flow only when it is high. It may be advantageous to pulse drains of the source follower transistors 56b, 56g,  
30 and 56 with a low duty cycle to save power during exposure. Pulsing the drains of the source follower transistors 56b, 56g, and 56 also keeps the photodiode voltages lower during the time the drain is low, which can beneficially reduce voltage-dependent leakage at those nodes.

There are several advantages obtained by use of the vertical color filter detector group of the present invention. First, only NMOS transistors are used in the sensing  
35 circuitry, which compared to a structure that would use opposite polarity transistors for the



5

green channel, has one half the control wires for a given pixel configuration, and occupies much less space because n-wells are not needed for PMOS devices as in prior-art schemes. The simplest pixel support needed for the vertical color filter detector group of the present invention requires only a total of six array wires running across the sensors.

10

From the disclosure of this illustrative embodiment of the three-color vertical color filter detector group of the present invention, persons of ordinary skill in the art will recognize that additional colors and/or other colors may be sensed according to the present invention by adding additional layers and/or changing the junction depths.

15

In addition, there is no image lag associated with the barrier gate mode that is sometimes used with pixel sensors. There is no interaction between the red, green, and blue photodiodes because of the isolation between sensors provided by the alternating-polarity diodes present in the structure.

20

None of the problems associated with complementary array support circuits, such as phase lag associated with digital and analog level shifters, are present in the pixel sensor of the present invention. Finally, the junction depths of the pixel sensor of the present invention may be more closely matched to the optimal junction depths for absorption of the red, green, and blue wavelengths, as shown in Table 1.

Color	wavelength	optimal junction depth um	Triple-Well CMOS	Present Invention
Blue	450	0.1-0.4	0.15	0.1-0.4
Green	550	0.8-1.2	0.5	0.8-1.2
Red	650	1.5-3.5	1.1	1.5-3.5

25

Table 1: junction depths for blue, green, and red detectors

From the disclosure herein, persons of ordinary skill in the art will recognize that there are numerous ways to realize the vertical color filter detector group of the present invention in a semiconductor structure. In one illustrative embodiment of the present invention, the six-layer structure of alternating p-type and n-type regions can be formed

5 using a semiconductor substrate as the bottom layer and forming five concentric wells of alternating conductivity type in the substrate.

In another illustrative embodiment of the present invention shown schematically in FIG. 3, the six-layer structure of alternating p-type and n-type regions can be formed using a semiconductor substrate 60 of a first conductivity type as the bottom layer in which a  
10 blanket diffusion-barrier implant 62 of the first conductivity type and a single well 64 of a second opposite conductivity type are disposed. The diffusion barrier 62 prevents carriers generated in the substrate from migrating upward to the green photodiode and provides isolation between the red photodiodes. The well 64 acts as the detector for the red photodiode. In this embodiment of the invention, a first epitaxial layer 66 having the first  
15 conductivity having a blanket diffusion-barrier implant 68 of the first conductivity type is disposed over the surface of the semiconductor substrate 60 and the substrate well 64 and a well 70 of the second conductivity type is disposed in the first epitaxial layer 66. The diffusion barrier implant 68 prevents carriers generated in the first epitaxial layer 66 from migrating upward to the blue photodiode and provides isolation between green  
20 photodiodes. The well 68 acts as the detector for the green photodiode. A second epitaxial layer 72 of the first conductivity type is disposed over the surface of the first epitaxial layer 66 and its well 70 and a doped region 74 of the second conductivity type (which may be a lightly-doped-drain implant) is formed in the second epitaxial layer 72. Doped region 74 forms the blue detector.

25 Contact is made to the buried green detector 70 and the buried red detector 64 via deep contact plugs. The contact plug for the buried green detector 70 is formed through second epitaxial layer 72 and the contact for buried red detector 64 is formed through second epitaxial layer 72 and through first epitaxial layer 66 as will be described further herein.

30 The hatched areas of FIG. 3 show the approximate locations of the implants used to create the p-type and n-type regions of the structure. The dashed line 76 defines the approximate border between the net-P and net-N doping for the blue detector 74. Similarly, the dashed line 78 defines the approximate border between the net-P and net-N doping for the green detector 70 with its vertical portion to the surface of the second  
35 epitaxial layer 66 forming the contact to the green detector 70. The dashed line 80 defines the approximate border between the net-P and net-N doping for the red detector 64 with its

5 vertical portion to the surface of the second epitaxial layer 66 forming the contact to the red detector 64.

As may be seen from the above-recited illustrative examples, other embodiments of the six-layer structure disclosed herein are contemplated to be within the scope of the present invention and may be realized by using various combinations of layers selected  
10 from among the substrate, one or more wells disposed in the substrate, one or more epitaxial layers, and one or more wells disposed in one or more epitaxial layers.

Persons of ordinary skill in the art will observe that all of the red, green, and blue photodiodes (indicated at reference numerals 64, 70, and 74, respectively, in FIG. 3) can be operated so that the depletion regions of the photodiodes do not interact (i.e. they are  
15 junction isolated) but may be alternatively operated either through control of doping levels, structure spacing or operating voltages such that the depletion regions do interact and may also be deeply depleted.

An illustrative semiconductor fabrication process for fabricating the vertical color filter detector group of FIG. 3 is disclosed with reference to FIGS. 4A through 4E, cross-sectional diagrams showing the structure resulting after completion of selected steps in the  
20 process.

The process starts with a  $1e15$  p-type substrate 90 shown in FIG. 4A. A blanket boron implant (shown at reference numeral 92) is performed to a depth of about 0.5  $\mu\text{m}$ . This boron implant 92 must be more heavily doped than the substrate because it acts as  
25 weak diffusion barrier to prevent electrons generated in the substrate 90 from diffusing up to the green photodiode, as well as separating the red photodiodes. This blanket implant should generally be anywhere from about 3X to 100X of the substrate doping level and in one embodiment of the invention is about  $1e16$ . Next, an implant masking layer (not shown) is then applied using conventional photolithographic techniques. Next, as shown in  
30 FIG. 4A, a masked phosphorus  $1e17$  implant (shown at reference numeral 94) is performed at an energy of around 50keV followed by an activation cycle as is known in the art to form the n-type layer for the red detector. This implant dose should be selected to be sufficient to overcompensate the blanket p-type implant. Persons of ordinary skill in the art will appreciate that the drive cycle must ensure adequate annealing for both the  
35 boron and phosphorus implants prior to growth of an epitaxial silicon layer. Persons

5 skilled in the art will also recognize that the order of the p-type blanket implant and the n-type masked implant to form the red photodiode n-type region could be reversed.

Referring now to FIG. 4B, next, a layer of  $1e15$  p-type epitaxial silicon 96 is grown to a thickness of about 2.0  $\mu\text{m}$ . The dopant concentration in the epitaxial layer 96 is as lightly doped as will guarantee p-type material in order that it will function as a potential  
10 well region so that photo-electrons generated therein do not diffuse past the p-type layers above or below it. Punch-through from red to green photodiodes is another design constraint affecting doping level in this layer, i.e., the doping needs to be sufficient to prevent depletion regions from the red and green photodiode cathodes from getting too close to each other, or fully depleting the p-type region between them.

15 Next, a plug implant masking layer (not shown) is then applied using conventional photolithographic techniques. A  $1e17$  phosphorus plug implant and an anneal sequence is then performed to form a plug contact to the cathode of the red photodiode. This plug implant should be a high-energy implant (i.e., about 1,000 KeV) or should comprise multiple implant steps at different energies. In one embodiment of the present invention, a  
20 tall, thin plug contact plug is formed by a combination of two different implants, one a high-energy implant 98 (i.e., about 1,200 KeV) for deep doping the bottom region of the plug contact, and the other a lower energy implant 100 (i.e., about 600 KeV) for doping the intermediate region of the plug contact, followed by a third implant or diffusion that is performed along with the doping for the green photodiode to complete the shallow surface  
25 region of the plug contact.

The plug resistance is not important since the photocurrent is small, however the size of the plug should be as small as possible to minimize pixel area and maximize fill factor. A plug size of 1 micron is a good target, but the depth of the plug contact needs to be about 2 microns. The multiple-implant plug disclosed herein makes it possible to  
30 achieve such a plug with a depth greater than its width.

Referring now to FIG. 4C, an implant masking layer (not shown) is then applied using conventional photolithographic techniques. A  $1e17$  phosphorus implant at an energy of around 50 KeV (shown at reference numeral 104) and activation sequence is then performed to form the n-type layer for the green detector. A second, smaller aperture in  
35 this masking layer serves to form the surface region 102 of the plug contact implant for the contact to the underlying cathode of the red detector. As persons of ordinary skill in the

5 art will appreciate, this implant requires activation drive to restore lattice integrity before the subsequent epitaxial layer deposition step.

Next, a blanket boron implant 106 of the epitaxial layer 96 is performed. This implant serves to counteract autodoping during the subsequent epitaxial layer deposition step. This implant also serves as a weak diffusion barrier to prevent green-photon-generated carriers from diffusing upward to the blue detector and separates the green photodiodes. This blanket implant 106 should generally be anywhere from about 3X to 100X of the doping level of the first epitaxial layer 96 and in one embodiment of the invention is about  $1e16$ . Persons skilled in the art will also recognize that the order of the p-type blanket implant and the n-type masked implant to form the green photodiode n-type region could be reversed, and that the doping concentration considerations are similar to those described above for the red photodiode.

Referring now to FIG. 4D, a layer of  $1e15$  p-type epitaxial silicon 108 is grown to a thickness of about 0.7 to 1.0  $\mu m$ . An implant masking layer (not shown) is then applied using conventional photolithographic techniques. A standard CMOS n-well implant is performed to form n-well regions 110 to make contact to the cathode 104 of the underlying green detector and n-well region 112 to make contact to the top of the plug contact 102 for the cathode 94 of the bottom red detector. The n-well regions 110 and 112 may require a double implant to reach the buried layers comprising the cathode 106 of the green detector and the plug contact for the cathode 94 of the red detector; typical CMOS n-well implant energies are around 500 KeV and 100 KeV, respectively, for the deep and shallow implants in n-well regions 110 and 112.

Referring now to FIG. 4E, an implant masking layer (not shown) is then applied using conventional photolithographic techniques. A CMOS p-well implant step is then performed to create p-well regions 114. As will be understood by persons of ordinary skill in the art, the CMOS p-well implant step may require a double energy implant to minimize the n-well-to-n-well spacing. These p-well regions 80 are for isolation between the contacts for the red and green detector plugs as well as between pixels (the rightmost and leftmost edge p-well regions). In addition, this p-well implant is used to create wells in which NMOS transistors for the rest of the circuitry on the chip will be formed.

Next, an implant masking layer (not shown) is then applied using conventional photolithographic techniques. A lightly-doped-drain implant shown at reference numeral

5 116 is then performed to form the cathode of the blue detector. In one embodiment of the invention, other apertures in this masking layer form surface portions of the deep contact regions for the red and green detectors, to allow good electrical contact to an overlying metal interconnect layer. Alternately, more heavily doped n-type regions may be formed in a separate processing step to form surface portions 118 and 120 of the deep contact  
10 regions for the red and green detectors as well as a contact region within the lightly-doped-drain implant for the blue detector. As an optional alternative to the illustrative process depicted in FIG. 4E, the cathode of the blue detector might be formed with a p-well underneath (i.e., an extension of regions 114).

The process employed for fabricating the vertical filter sensor group of the present  
15 invention is compatible with standard CMOS processes. The additional process steps are all performed prior to the standard CMOS steps, thus minimizing interactions.

Two epitaxial layers 96 and 108, as sometimes employed in BiCMOS, are required, as well as two extra implant activation cycles, one before each epitaxial growth step. As will be apparent to such persons of ordinary skill, three extra masks are required  
20 in the process for implanting the n-type regions 94, 98, 100 102, and 104 for the red detector, the red contact plug, and the green detector. The process requires five extra implants including the red detector counterdoping 92 and the green detector counterdoping 106 (six extra implants are required if regions 98 and 100 are formed separately). The masking, implanting, drive-in and anneal, and epitaxial growth fabrication process steps  
25 described above for fabricating the novel structure disclosed herein are individually well known to persons of ordinary skill in the semiconductor processing art for fabricating other semiconductor devices. Process parameters, such as times, temperatures, reactant species, etc. will vary between individual processes but are known for use in such individual processes. Such details will not be recited herein to avoid overcomplicating the  
30 disclosure and thus obscuring the invention.

The fabrication process disclosed herein provides several advantages. There are no large lateral diffusions associated with implant and drive wells, resulting in a smaller pixel area. The vertical plugs needed to connect to buried layers can be small.

There is no need for large n-type or p-type isolation rings. Only the detector plug  
35 contacts need to be isolated from each other and the other detectors. This allows for a small sensor group area.

5 As shown, this six-layer three-color photodiode structure uses two epitaxial layers, as are sometimes found in BiCMOS processes. Silicon quality generally improves as more epitaxial layers are grown. In addition, the sensor group including pixel readout circuits according to this embodiment of the present invention can be made in any BiCMOS fabrication facility. The topmost layers may be formed using a conventional  
10 CMOS process, (i.e., n+, n-well, and p-well). In addition, the layer referred to herein as the substrate may itself be an epitaxial layer formed on an underlying substrate.

Referring now to FIG. 5, a diagram shows an illustrative 2 by 2 portion 120 of an array of vertical color filter detector groups according to the present invention. Persons of ordinary skill in the art will readily appreciate that the array portion disclosed in FIG. 5 is  
15 illustrative only and that arrays of arbitrary size may be fabricated using the teachings herein. The illustrative array example of FIG. 5 employs circuitry with a storage feature such as is depicted in FIG. 2C including a transfer transistor and so includes a global transfer signal line serving the array. Persons of ordinary skill in the art will appreciate that arrays employing circuitry similar to that depicted in FIGS. 2A and 2B without  
20 storage and thus without a transfer transistor are also contemplated as within the scope of the present invention and that such arrays will not include a transfer signal line.

As would be expected by persons of ordinary skill in the art and as shown in FIG. 3, common RESET and XFR lines will be provided for all of the vertical color filter detector groups in the array. As presently preferred, a separate VSFD line is provided for  
25 each row in the array, although embodiments of the present invention having a single VSFD node are also contemplated. The source of the row select transistor for each color in FIGS. 2A through 2C in a column of the array will be coupled to a separate column line associated with that column and the gate of all row select transistors for all colors for each vertical color filter detector group in a row of the array will be coupled to a ROW-  
30 SELECT line associated with that row.

The 2 by 2 portion 120 of the array in FIG. 5 includes two rows and two columns of vertical color filter detector groups according to the present invention. A first row includes vertical color filter detector groups 122-1 and 122-2; a second row includes vertical color filter detector groups 122-3 and 122-4. A first column includes vertical color  
35 filter detector groups 122-1, 122-3; a second column includes vertical color filter detector groups 122-2 and 122-4.

5 A first ROW-SELECT line 124-1 is connected to the row-select inputs (ROW-SELECT) of vertical color filter detector groups 122-1 and 122-2. A second ROW-SELECT line 124-2 is connected to the row-select inputs (ROW-SELECT) of vertical color filter detector groups 122-3 and 122-4. The first and second ROW-SELECT lines may be driven from a row decoder (not shown) as is well known in the art.

10 A first set of three (blue, green, and red) COLUMN OUT lines 126-1 is connected to the outputs of vertical color filter detector groups 122-1 and 122-3. A second set of three COLUMN OUT lines 126-2 is connected to the outputs of vertical color filter detector groups 122-2 and 122-4. The first and second sets of COLUMN OUT lines are coupled to sets of column readout circuits (not shown) as is well known in the art.

15 A global RESET line 128 is connected to the reset (R) inputs of all of the vertical color filter detector groups 122-1 through 122-4. A first VSFD line 130-1 is connected to the VSFD inputs of the vertical color filter detector groups 122-1 and 122-2 in the first row of the array. A second VSFD line 130-2 is connected to the VSFD inputs of the vertical color filter detector groups 122-3 and 122-4 in the second row of the array. A  
20 global XFR line 132 is connected to the XFR inputs of all of the vertical color filter detector groups 122-1 through 122-4.

A global PIX-VCC line 134 is connected to the PIX-VCC inputs of all of the vertical color filter detector groups 122-1 through 122-4. Alternately, multiple PIX-VCC lines (one for each column) could be provided.

25 Referring now to FIG. 6A, a timing diagram illustrates the operation of the embodiment of the vertical color filter detector groups shown in FIG. 2C of the present invention. Initially, the RESET signal is asserted high. The drains of the reset transistors 54b, 54g, and 54r are brought from zero volts to the voltage PIX-VCC. This action resets all vertical color filter detector groups in the array by placing the voltage potential PIX-  
30 VCC at the cathode of each photodiode. According to one method for operating the vertical color filter detector groups of the present invention illustrated in FIG. 6A, the voltage PIX-VCC is initially at a low level (e.g., to zero volts) while RESET is high to reset the cathode voltages of all photodiodes in the array to a low value to quickly equalize their states. Then the voltage PIX-VCC is raised (e.g., to about 2 volts) for a  
35 predetermined time (preferably on the order of a few milliseconds) while the RESET signal is still asserted to allow the photodiodes in all vertical color filter detector groups to



5 charge up to about 1.4 volts. The black level at the photodiode cathodes is thus set to PIX-VCC, less a little for the capacitive turn-off transient from the reset transistors.

When the RESET signal is de-asserted and photointegration begins, charge accumulates on the photodiode cathodes. The voltage at the source of the source-follower transistors 56b, 56g, and 56r, follows the voltage on their gates. In embodiments of the present invention that employ transfer transistors 59b, 59g, and 59r, the XFR signal is asserted throughout the reset period and the integration period and is de-asserted to end the integration period as illustrated in FIG. 6A. The low level of the XFR signal is preferably set to zero or a slightly negative voltage, such as about -0.2 volts, to thoroughly turn off transfer transistors 59b, 59g, and 59r.

15 To read out a pixel sensor, the drains of the source-follower transistors 56b, 56g, and 56r are driven to the voltage VSFD, the ROW-SELECT signal for the row of the array containing the transistors 59b, 59g, and 59r is asserted, and the output signal is thereby driven onto COLUMN OUT lines. The timing of the assertion of the VSFD signal is not critical, except that it should remain high until after the ROW-SELECT signal is de-asserted as illustrated in FIG. 6A. It may be advantageous to limit the voltage slope at the rising edge of the ROW-SELECT signal if VSFD is raised first, as disclosed in co-pending application serial No. 09/492,103, filed February 14, 2000, docket No. FOV-038.

Referring now to FIG. 6B, a timing diagram illustrates one method for operating the sensor group realization of FIG. 2B. The reset operation proceeds as described relative to FIG. 6A. After RESET falls, exposure can begin; however, since without the XFR switch the active pixel sensor does not have an electronic shutter capability, it may be the case that a mechanical shutter is used to control the exposure. Accordingly, a SHUTTER signal is shown, indicative of a time when a shutter is letting light fall on the sensor. After the shutter closes, the RESET signal is not re-asserted as it was in FIG. 6A, since the signal needs to remain stored on the photodiode cathodes until after readout. Readout using ROW-SELECT and VSFD works as described with respect to FIG. 6A. After readout, PIX-VCC and RESET can be cycled back to their initial states.

As is well known in the art, there are other methods of operating 3-transistor active pixel sensor to avoid the need for a shutter.

35 The control signals depicted in FIGS. 6A and 6B may be generated using conventional timing and control logic. The configuration of the timing and control logic

5 circuit will depend on the particular embodiment of the present invention, but in any event will be conventional circuitry, the particular design of which is a trivial task for persons of ordinary skill in the art having examined FIGS. 6A and 6B once a particular embodiment of the present invention is selected.

10 While embodiments and applications of this invention have been shown and described, it would be apparent to those skilled in the art that many more modifications than mentioned above are possible without departing from the inventive concepts herein. The invention, therefore, is not to be restricted except in the spirit of the appended claims.

5 What is claimed is:

1. A vertical color filter detector group formed on a semiconductor substrate and comprising at least three detector layers configured to collect photo-generated carriers of a first polarity, separated by additional intervening reference layers configured to collect and conduct away photo-generated carriers of the opposite polarity, said at least three  
10 detector layers disposed substantially in vertical alignment with each other and having different spectral sensitivities as a function of their different depths in the semiconductor substrate.

2. The vertical color filter detector group of claim 1 further comprising an individual active pixel sensor readout circuit coupled to each of said at least three detector  
15 layers.

3. The vertical color filter detector group of claim 1 wherein said at least three detector layers are configured by doping to collect said photo-generated carriers of a first polarity and said plurality of reference layers are configured by doping to collect and conduct away said photo-generated carriers of said opposite polarity.

20 4. The vertical color filter detector group of claim 3 wherein said doping of said at least three detector layers and said doping of said plurality of reference layers is such as to cause junction isolation between adjacent ones of said detector layers and said reference layers.

25 5. The vertical color filter detector group of claim 3 wherein said photo-generated carriers of a first polarity are negative electrons and said photo-generated carriers of said opposite polarity are positive holes.

6. The vertical color filter detector group of claim 1 wherein each detector group includes a blue photodetector at a blue-sensitive n-type layer at the surface of the semiconductor, a green photodetector at a green-sensitive n-type layer disposed at a first  
30 depth in said semiconductor, and a red photodetector at a red-sensitive n-type layer disposed at a second depth greater than said first depth in said semiconductor.

7. The vertical color filter detector group of claim 6 wherein:  
a reference layer is disposed below said blue-sensitive n-type layer;  
reference layers are disposed above and below said green-sensitive n-type  
35 layer and said red-sensitive n-type layer.

8. The vertical color filter detector group of claim 6 further including:

5 blue active pixel sensor circuitry coupled to said blue-sensitive n-type layer;  
green active pixel sensor circuitry coupled to said green-sensitive n-type  
layer; and

red active pixel sensor circuitry coupled to said red-sensitive n-type layer.

9. The vertical color filter detector group of claim 8 disposed in an array and  
10 associated with a column thereof and wherein;

said blue active pixel sensor circuitry has an output coupled to a blue output  
line associated with the column;

said green active pixel sensor circuitry has an output coupled to a green  
output line associated with said column; and

15 said red active pixel sensor circuitry has an output coupled to a red output  
line associated with said column.

10. The vertical color filter detector group of claim 1 further including a  
diffusion barrier region disposed in a layer below a lowest one of said detector layers.

11. The vertical color filter detector group of claim 1 further including a  
20 diffusion barrier region disposed in a layer below a second lowest one of said detector  
layers.

12. The vertical color filter detector group of claim 1 further including:  
a diffusion barrier region disposed in a layer below a lowest one of said  
detector layers; and

25 a diffusion barrier region disposed in a layer below a second lowest one of  
said detector layers.

13. A vertical color filter detector group formed on a semiconductor substrate  
comprising at least six layers of alternating p-type and n-typed doped regions, PN junctions  
formed between abutting ones of said doped regions operating as photodiodes having  
30 spectral sensitivities that are a function of junction depth from an upper surface of said at  
least six layers, first alternate ones of said doped regions disposed substantially in vertical  
alignment with each other and serving as detector regions to collect photo-generated  
carriers, second alternate ones of said doped regions that are not detector regions serving as  
reference regions coupled to a reference potential.

35 14. The vertical color filter detector group of claim 13 wherein:  
said detector regions comprise n-type doped regions;

- 5                   said reference regions comprise p-type doped regions; and  
                  said reference potential is ground.
15.       The vertical color filter detector group of claim 14 wherein:  
          a blue detector region comprises a first n-type layer at an upper surface of  
said at least six layers;
- 10           a green detector region comprises a second n-type layer disposed below said  
first n-type layer; and  
          a red detector region comprises a third n-type layer disposed below said  
second n-type layer.
16.       The vertical color filter detector group of claim 15 wherein:  
15           a bottom surface of said blue detector region lies at a depth of between about  
0.05 microns and about 0.5 microns from a top surface of said first n-type semiconductor  
layer;
- a bottom surface of said green detector region lies at a depth of between  
about 0.5 microns and about 1.5 microns from said top surface of said first n-type  
20 semiconductor layer; and  
          a bottom surface of said red detector region lies at a depth of between about  
1.5 microns and about 3.5 microns from said top surface of said first n-type semiconductor  
layer.
17.       The vertical color filter detector group of claim 15 wherein:  
25           a bottom surface of said blue detector region lies at a depth of about 0.3  
microns from a top surface of said first n-type semiconductor layer;
- a bottom surface of said green detector region lies at a depth of about 1.0  
microns from said top surface of said first n-type semiconductor layer; and  
          a bottom surface of said red detector region lies at a depth of about 2.5  
30 microns from said top surface of said first n-type semiconductor layer.
18.       The vertical color filter detector group of claim 15 further including:  
          blue active pixel sensor circuitry coupled to said blue detector region;  
          green active pixel sensor circuitry coupled to said green detector region; and  
          red active pixel sensor circuitry coupled to said red detector region.
- 35       19.       The vertical color filter detector group of claim 15 wherein said blue, green,  
and red pixel sensor circuitry each comprises;

5 a reset transistor having a source coupled to its corresponding detector region, a gate coupled to a reset signal line, and a drain coupled to a reset reference potential;

a source-follower transistor having a gate coupled to its corresponding detector region, a drain coupled to a drain supply potential, and a source; and

10 a row-select transistor having a drain coupled to said source of said source-follower transistor, a source coupled to a column output line, and a gate coupled to a row-select signal line.

20. The vertical color filter detector group of claim 15 wherein said blue, green, and red pixel sensor circuitry each comprises;

15 a reset transistor having a source coupled to its corresponding detector region, a gate coupled to a reset signal line, and a drain coupled to a reset reference potential;

a transfer transistor having a drain coupled to said source of said reset transistor, a gate coupled to a transfer signal line, and a source

20 a source-follower transistor having a gate coupled to said source of said transfer transistor, a drain coupled to a drain supply potential, and a source; and

a row-select transistor having a drain coupled to said source of said source-follower transistor, a source coupled to a column output line, and a gate coupled to a row-select signal line.

25 21. A vertical color filter detector group formed on a semiconductor substrate of a first conductivity type comprising:

a first well of a second conductivity type opposite said first conductivity type formed in the substrate;

30 a first epitaxial layer of said first conductivity type formed over an upper surface of said semiconductor substrate;

a second well of said second conductivity type formed in said first epitaxial layer in substantial vertical alignment with said first well;

a second epitaxial layer of said first conductivity type formed over an upper surface of said first epitaxial layer;

35 a shallow diffusion of said second conductivity type formed in said second epitaxial layer in substantial vertical alignment with said first well;

5                wherein said substrate and said first and second epitaxial regions are coupled to a reference potential.

22.    The vertical color filter detector group of claim 21, further including:

10                a red contact region of said second conductivity type formed through said first and second epitaxial layers making an electrical contact between said first well and an upper surface of said second epitaxial layer, said red output contact region being higher than it is wide; and

              a green contact region of said second conductivity type formed through said second epitaxial layer making an electrical contact between said second well and an upper surface of said second epitaxial layer.

15                23.    The vertical color filter detector group of claim 22 wherein said first conductivity type is p-type and said second conductivity type is n-type.

24.    The vertical color filter detector group of claim 21 wherein said reference potential is ground.

25.    The vertical color filter detector group of claim 21 wherein:

20                a bottom surface of said shallow diffusion lies at a depth of between about 0.05 microns and about 0.5 microns from a top surface of said second epitaxial layer;

              a bottom surface of said second well lies at a depth of between about 0.5 microns and about 1.5 microns from said top surface of said second epitaxial layer; and

25                a bottom surface of said first well lies at a depth of between about 1.5 microns and about 3.5 microns from said top surface of said second epitaxial layer.

26.    The vertical color filter detector group of claim 21 wherein:

              a bottom surface of said shallow diffusion lies at a depth of about 0.3 microns from said top surface of said second epitaxial layer;

30                a bottom surface of said second well lies at a depth of about 1.0 microns from said top surface of said second epitaxial layer; and

              a bottom surface of said first well lies at a depth of about 2.5 microns from said top surface of said second epitaxial layer.

27.    The vertical color filter detector group of claim 22 further including:

              blue active pixel sensor circuitry coupled to said shallow diffusion;

35                green active pixel sensor circuitry coupled to said second well; and

              red active pixel sensor circuitry coupled to said first well.

5           28.    The vertical color filter detector group of claim 27 wherein said blue, green, and red active pixel sensor circuitry each comprises;

                  a reset transistor having a source coupled to the one of said first and second wells and said shallow diffusion associated with its color, a gate coupled to a reset signal line, and a drain coupled to a reset reference potential;

10           a source-follower transistor having a gate coupled to the one of said first and second wells and said shallow diffusion associated with its color, a drain coupled to a drain supply potential, and a source; and

                  a row-select transistor having a drain coupled to said source of said source-follower transistor, a source coupled to a column line, and a gate coupled to a row-select signal line.

15           29.    The vertical color filter detector group of claim 27 wherein said blue, green, and red active pixel sensor circuitry each comprises;

                  a reset transistor having a source coupled to the one of said first and second wells and said shallow diffusion associated with its color, a gate coupled to a reset signal line, and a drain coupled to a reset reference potential;

20           a transfer transistor having a drain coupled to said source of said reset transistor, a gate coupled to a transfer signal line, and a source

                  a source-follower transistor having a gate coupled to said source of said transfer transistor, a drain coupled to a drain supply potential, and a source; and

25           a row-select transistor having a drain coupled to said source of said source-follower transistor, a source coupled to a column line, and a gate coupled to a row-select signal line.

30           30.    A method for fabricating a vertical color filter detector group comprising:

                  providing a semiconductor substrate of a first conductivity type;

30           forming a first well of a second conductivity type opposite to said first conductivity type in said semiconductor substrate;

                  forming a first epitaxial layer of said first conductivity type over said first well and said semiconductor substrate;

35           forming a lower portion of a first contact plug in said first epitaxial layer to contact said first well;



- 5           forming a second well of said second conductivity type in said first epitaxial layer substantially in vertical alignment with said first well;
- forming a second epitaxial layer of said first conductivity type over said second well and said first epitaxial layer;
- forming an upper portion of said first contact plug and a second contact plug
- 10   in said second epitaxial layer, said upper portion of said first contact plug contacting said lower portion of said first contact plug in said first epitaxial layer and said second contact plug contacting said second well; and
- forming a shallow diffusion of said second conductivity type in said second epitaxial layer substantially in vertical alignment with said first well.
- 15       31.    The method of claim 30 wherein forming said lower portion of said contact plug in said first epitaxial layer comprises performing multiple implants with different energies.
32.    The method of claim 31 wherein at least one of said multiple implants is performed simultaneously with forming said second well.
- 20       33.    The method of claim 30 wherein forming said upper portion of said first contact plug and said second contact plug in said second epitaxial layer comprises performing a single implant.
34.    The method of claim 30 wherein forming said upper portion of said first contact plug and said second contact plug in said second epitaxial layer comprises
- 25   performing multiple implants.
35.    The method of claim 30 wherein forming said lower portion of said first contact plug in said first epitaxial layer and forming said upper portion of said first contact plug in said second epitaxial layer comprise forming a contact plug through said first and second epitaxial layers that is substantially higher than it is wide.
- 30       36.    The method of claim 35 wherein forming said lower portion of said first contact plug in said first epitaxial layer and forming said upper portion of said first contact plug in said second epitaxial layer comprise forming a contact plug through said first and second epitaxial layers that is at least twice as high as it is wide.
37.    The method of claim 30 wherein forming said shallow diffusion comprises
- 35   forming a lightly doped drain region.

5           38.    The method of claim 30 further including forming NMOS and PMOS transistors in said second epitaxial layer.

          39.    A method for fabricating a vertical color filter detector group comprising:  
                  providing a semiconductor substrate of a first conductivity type;  
                  forming a first well of a second conductivity type opposite to said first  
10 conductivity type in said semiconductor substrate;

                  forming a first epitaxial layer of said first conductivity type over said first well and said semiconductor substrate;

                  forming a lower portion of a first contact plug in said first epitaxial layer to contact said first well by implanting atoms of said second conductivity type a first time at a  
15 first energy level and then implanting atoms of said second conductivity type a second time, at a second energy level different from said first energy level;

                  forming a second well of said second conductivity type in said first epitaxial layer substantially in vertical alignment with said first well;

                  forming a second epitaxial layer of said first conductivity type over said first  
20 epitaxial layer and said second well;

                  forming an upper portion of said first contact plug and a second contact plug in said second epitaxial layer, said upper portion of said first contact plug contacting said lower portion of said first contact plug in said first epitaxial layer and said second contact plug contacting said second well; and

25                   forming a shallow diffusion of said second conductivity type in said second epitaxial layer substantially in vertical alignment with said first well.

          40.    The method of claim 39 wherein forming said lower portion of said first contact plug in said first epitaxial layer and forming said upper portion of said first contact plug in said second epitaxial layer comprise forming a contact plug through said first and  
30 second epitaxial layers that is substantially higher than it is wide.

          41.    The method of claim 39 wherein forming said shallow diffusion comprises forming a lightly doped drain region.

          42.    The method of claim 39 further including forming NMOS and PMOS transistors in said second epitaxial layer.

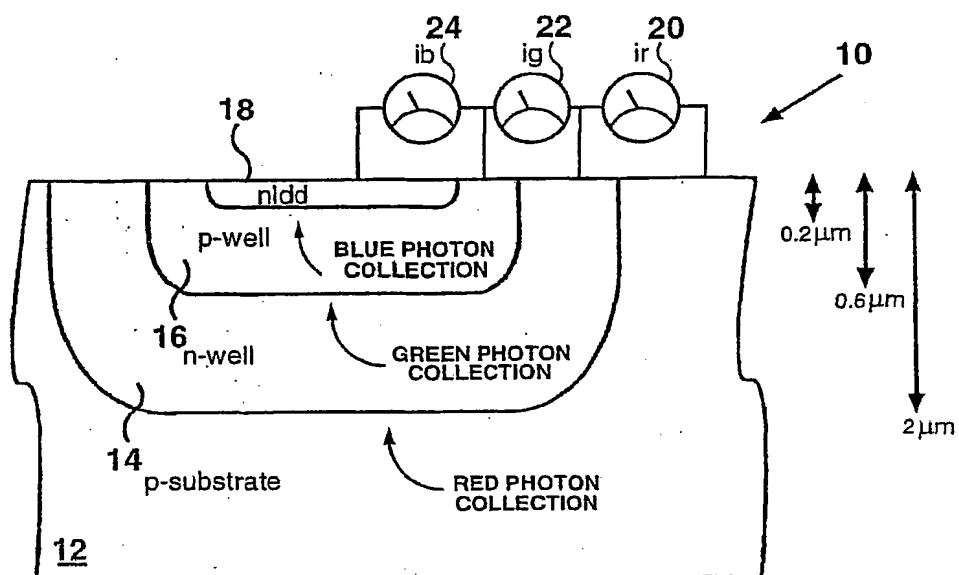


FIG. 1

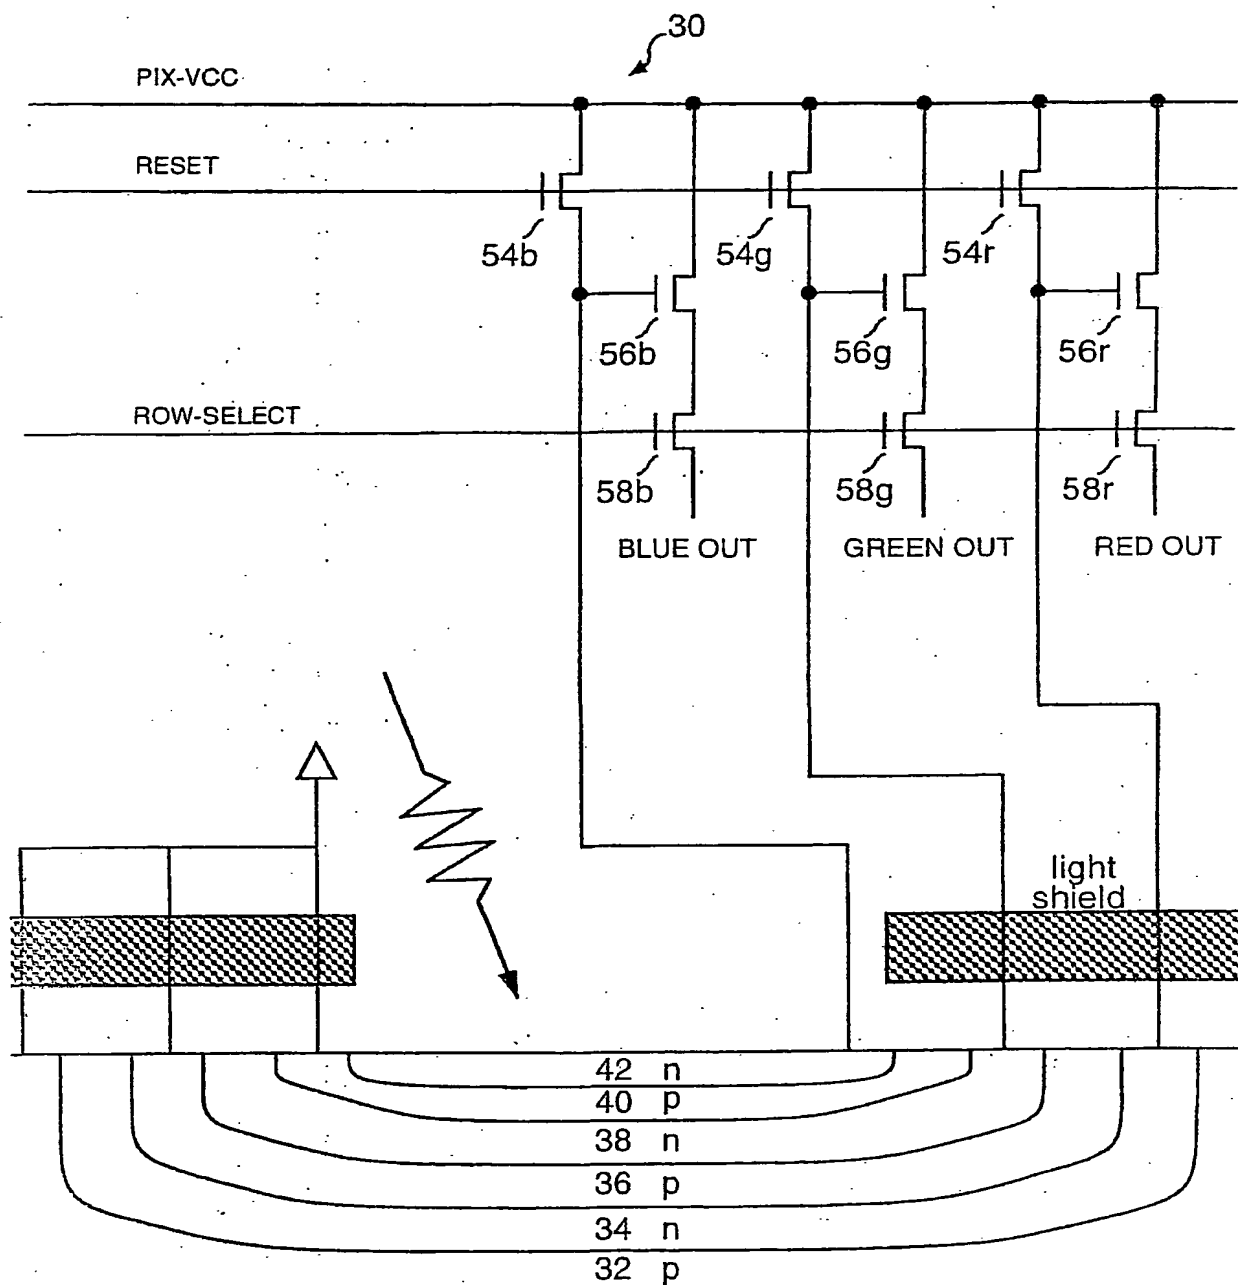


FIG. 2A

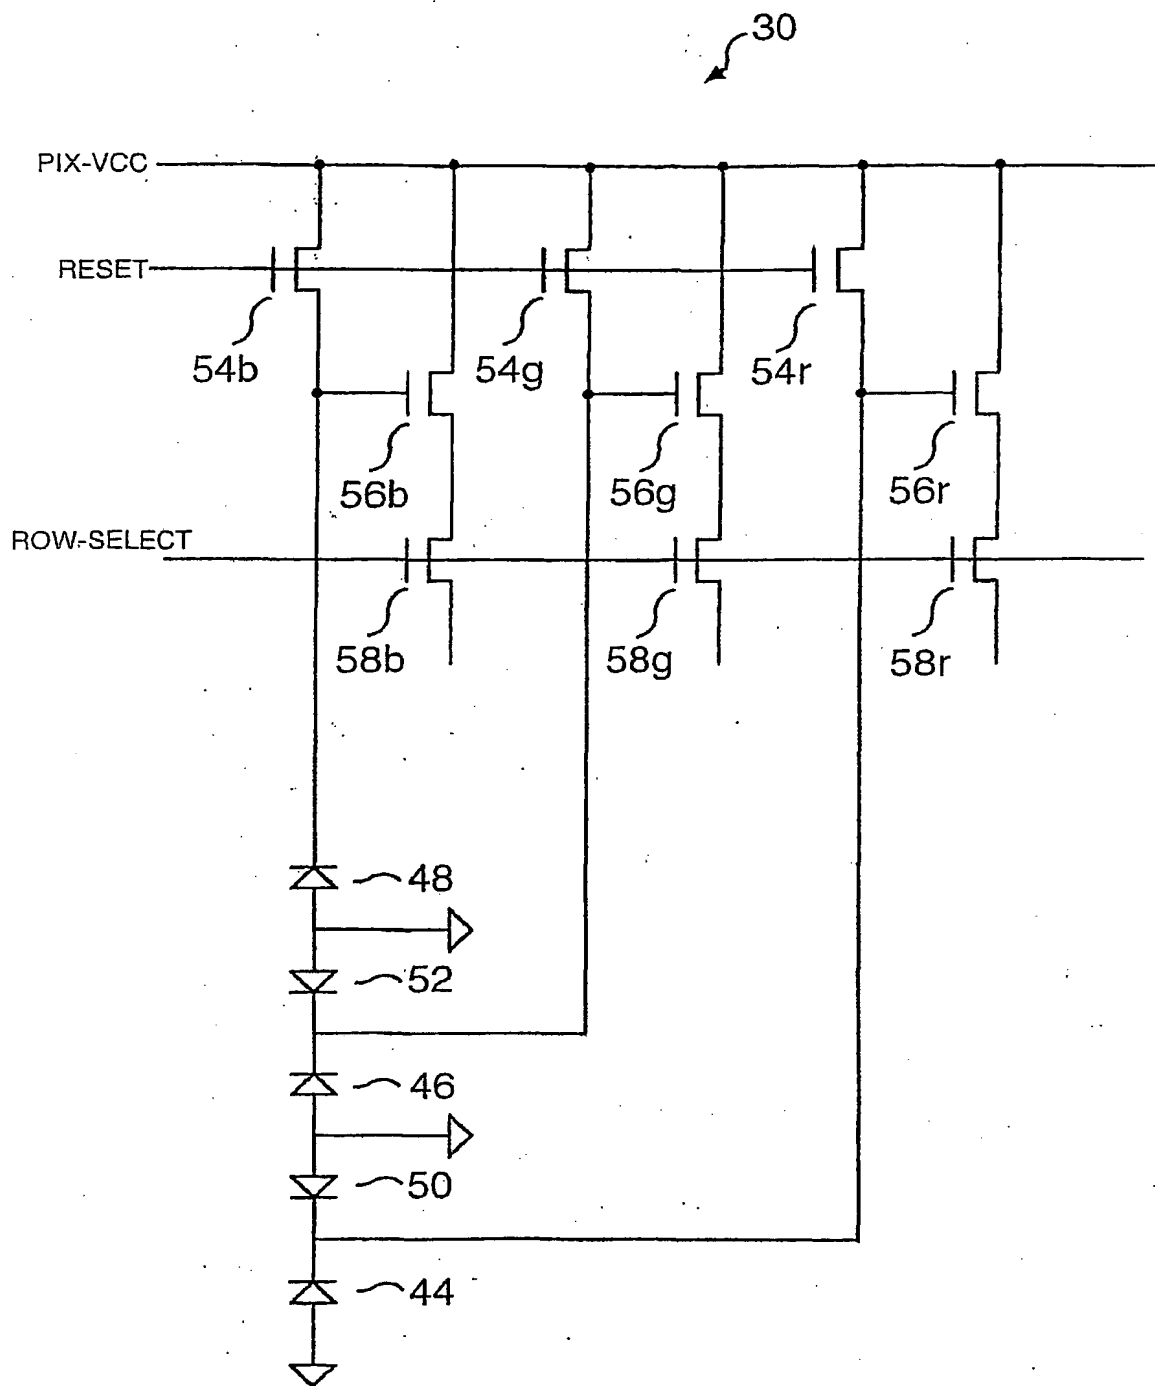


FIG. 2B

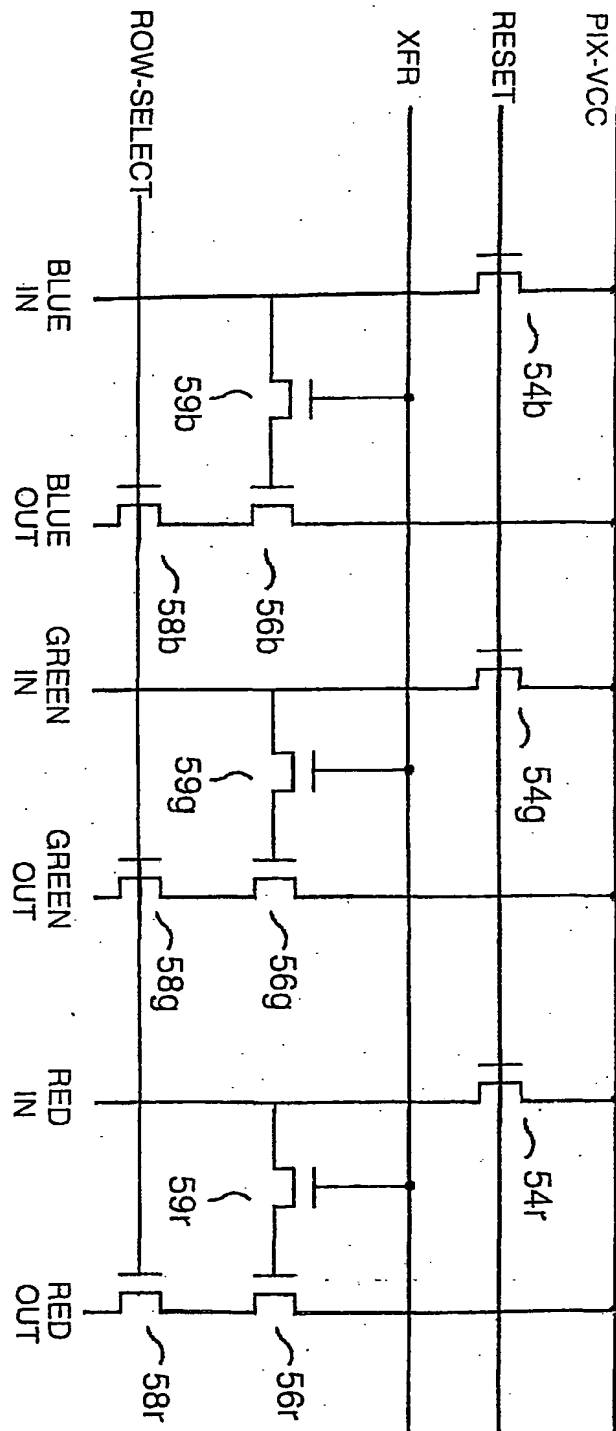


FIG. 2C

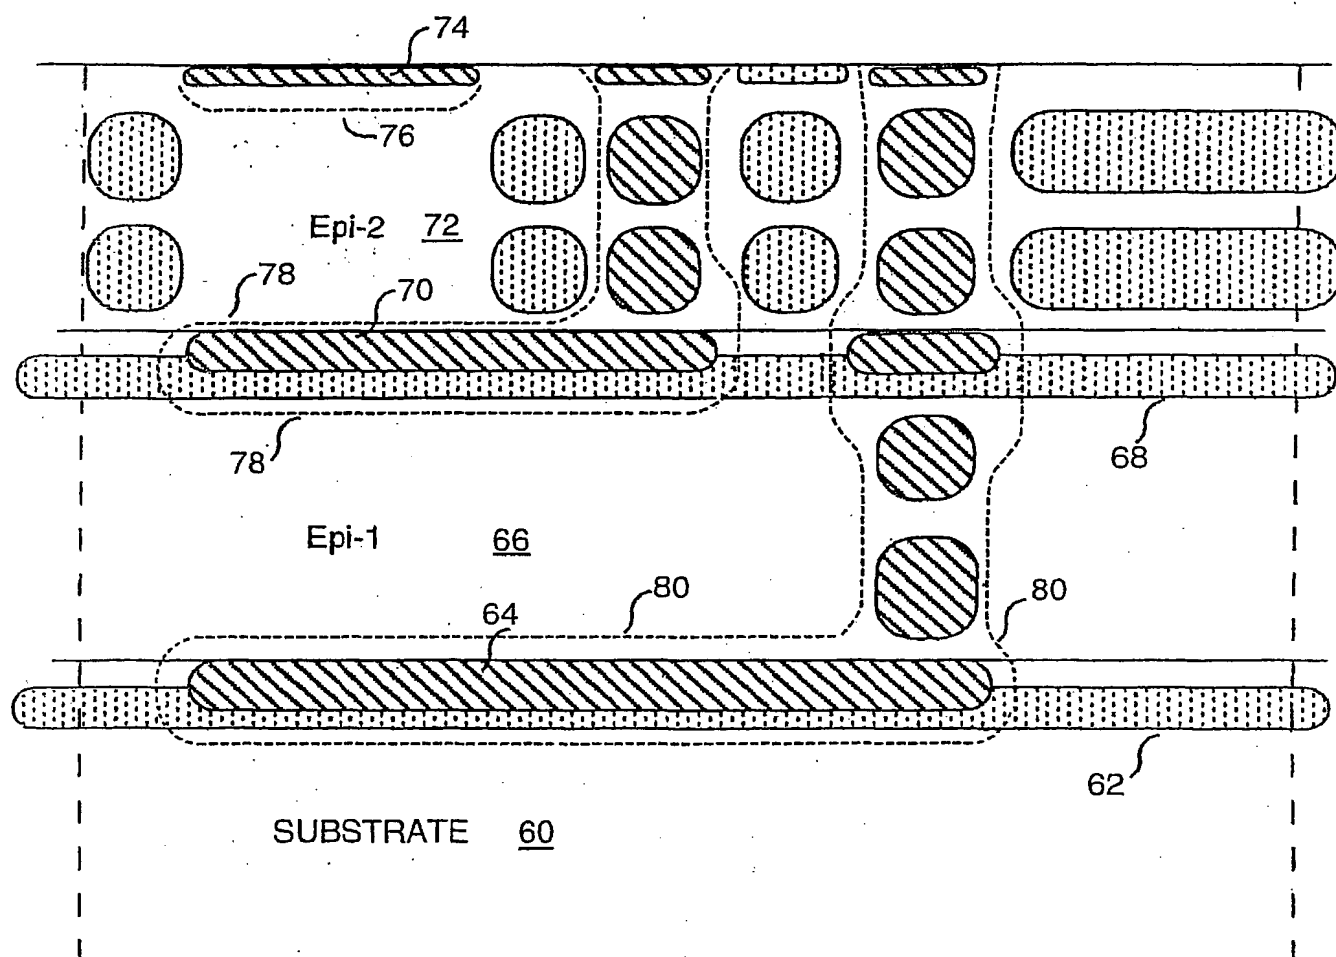
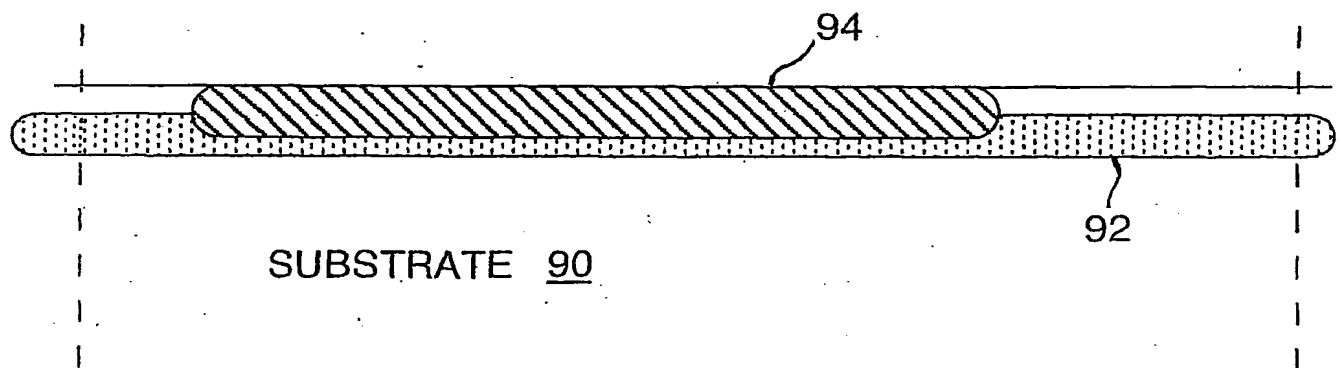


FIG. 3



**FIG. 4A**



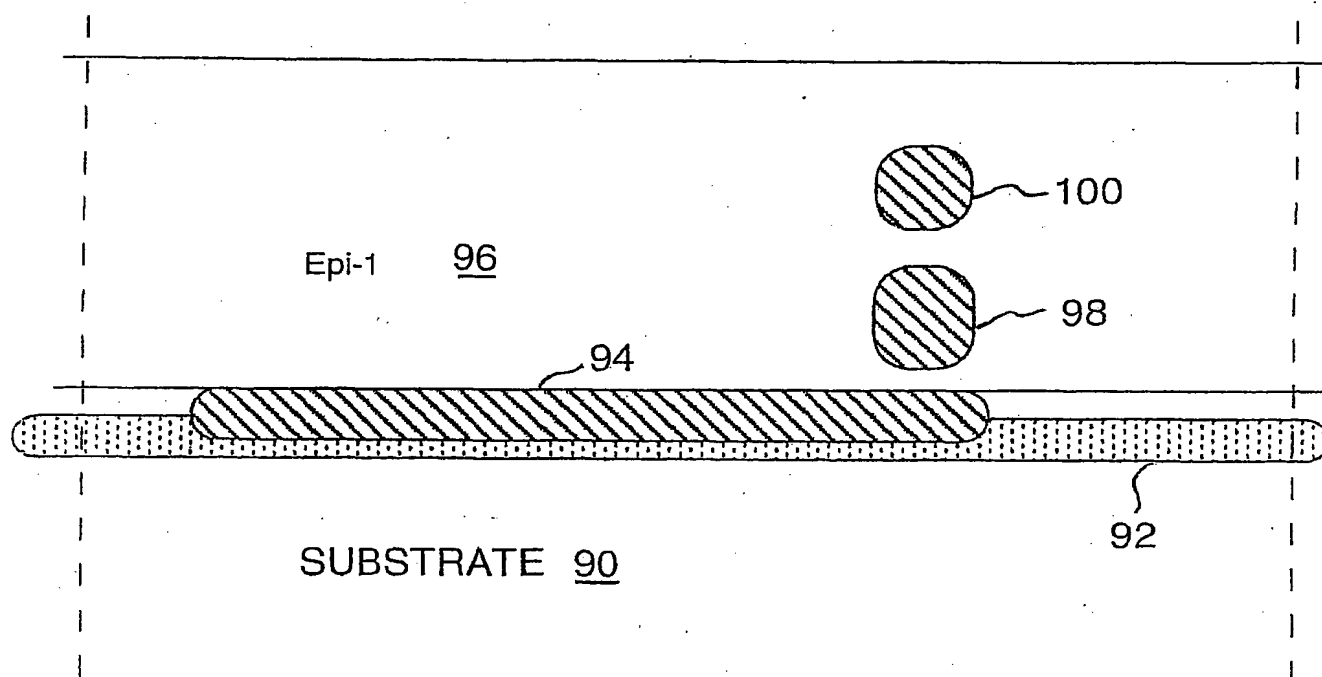
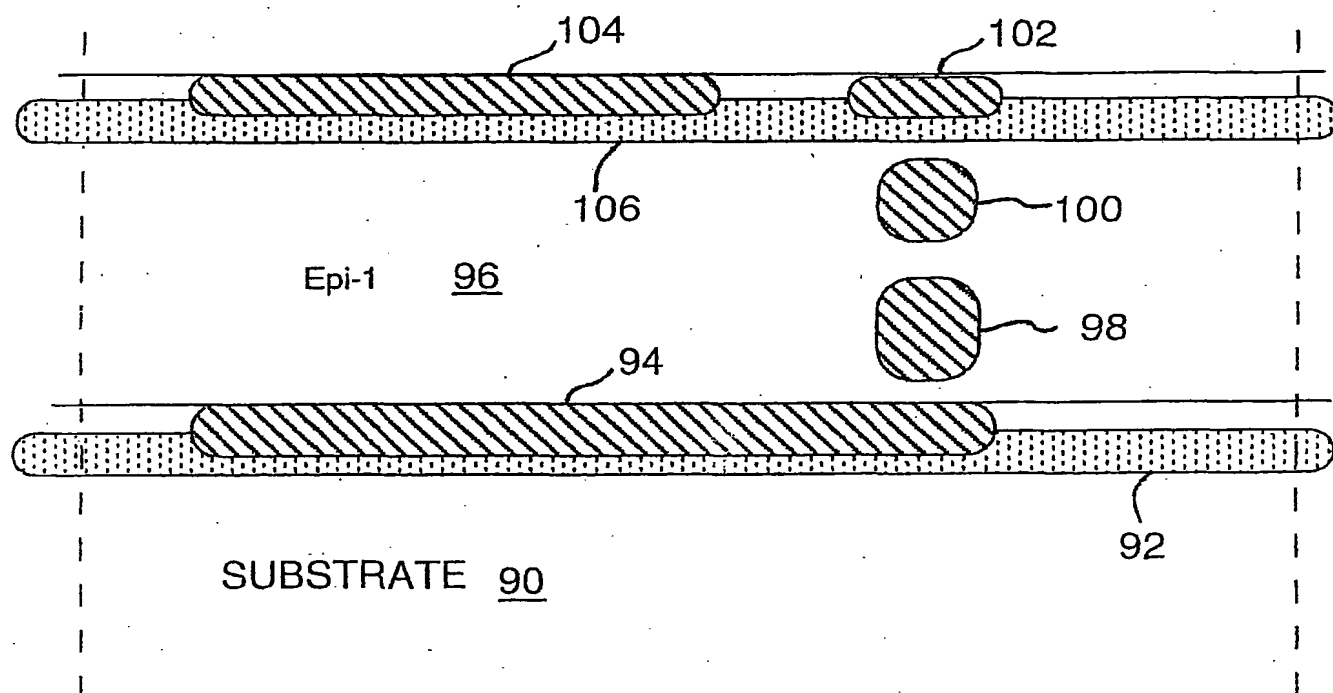


FIG. 4B



**FIG. 4C**

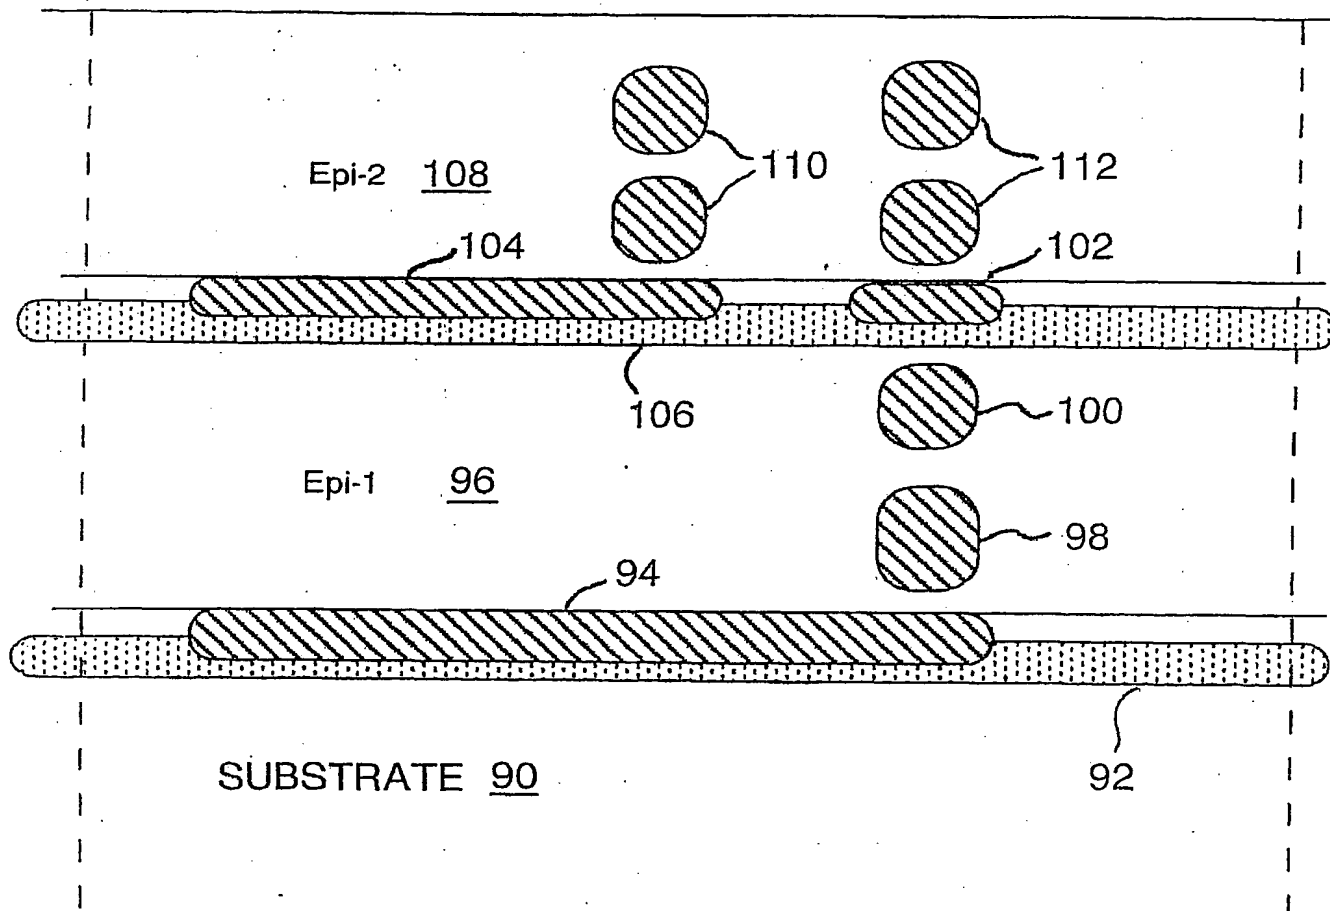
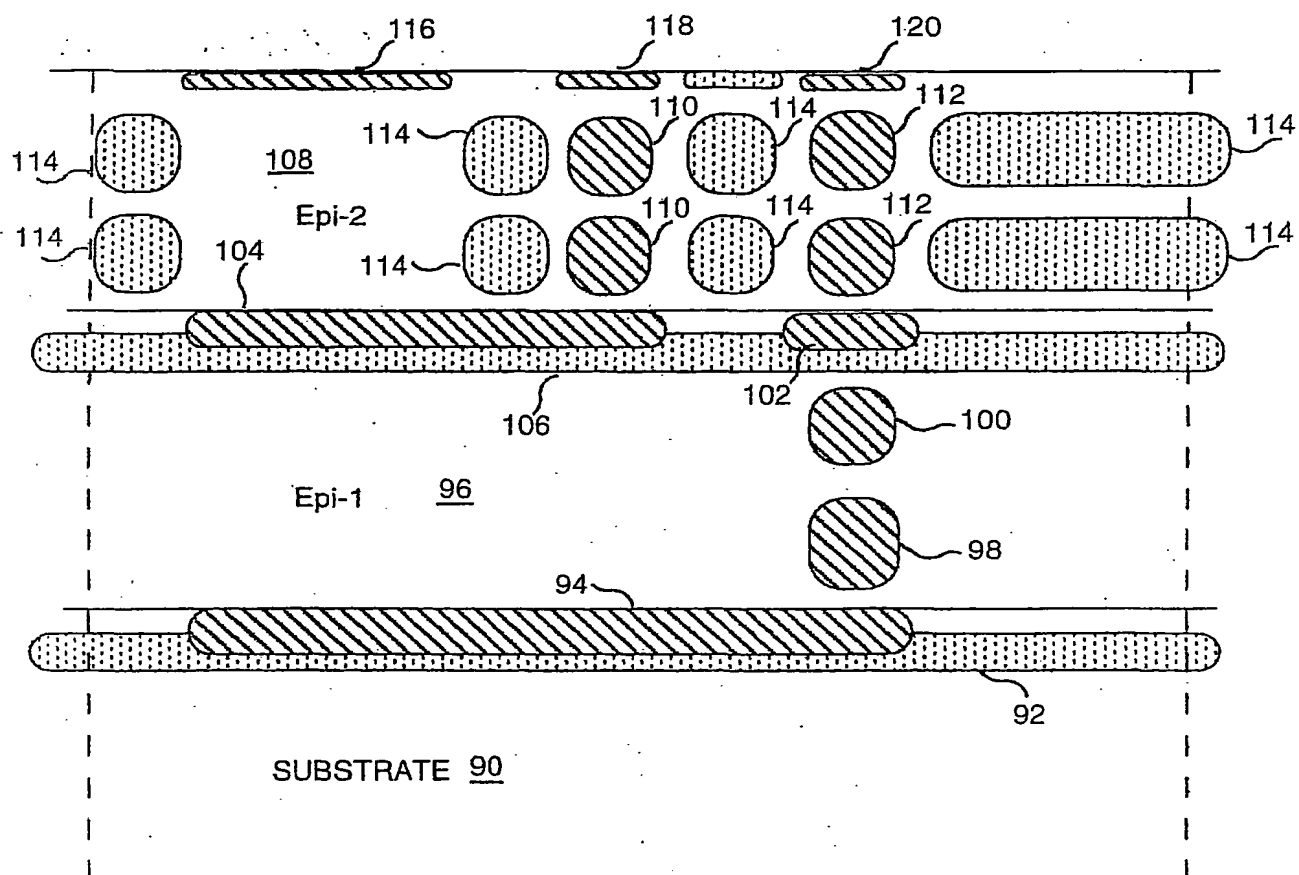


FIG. 4D

**FIG. 4E**

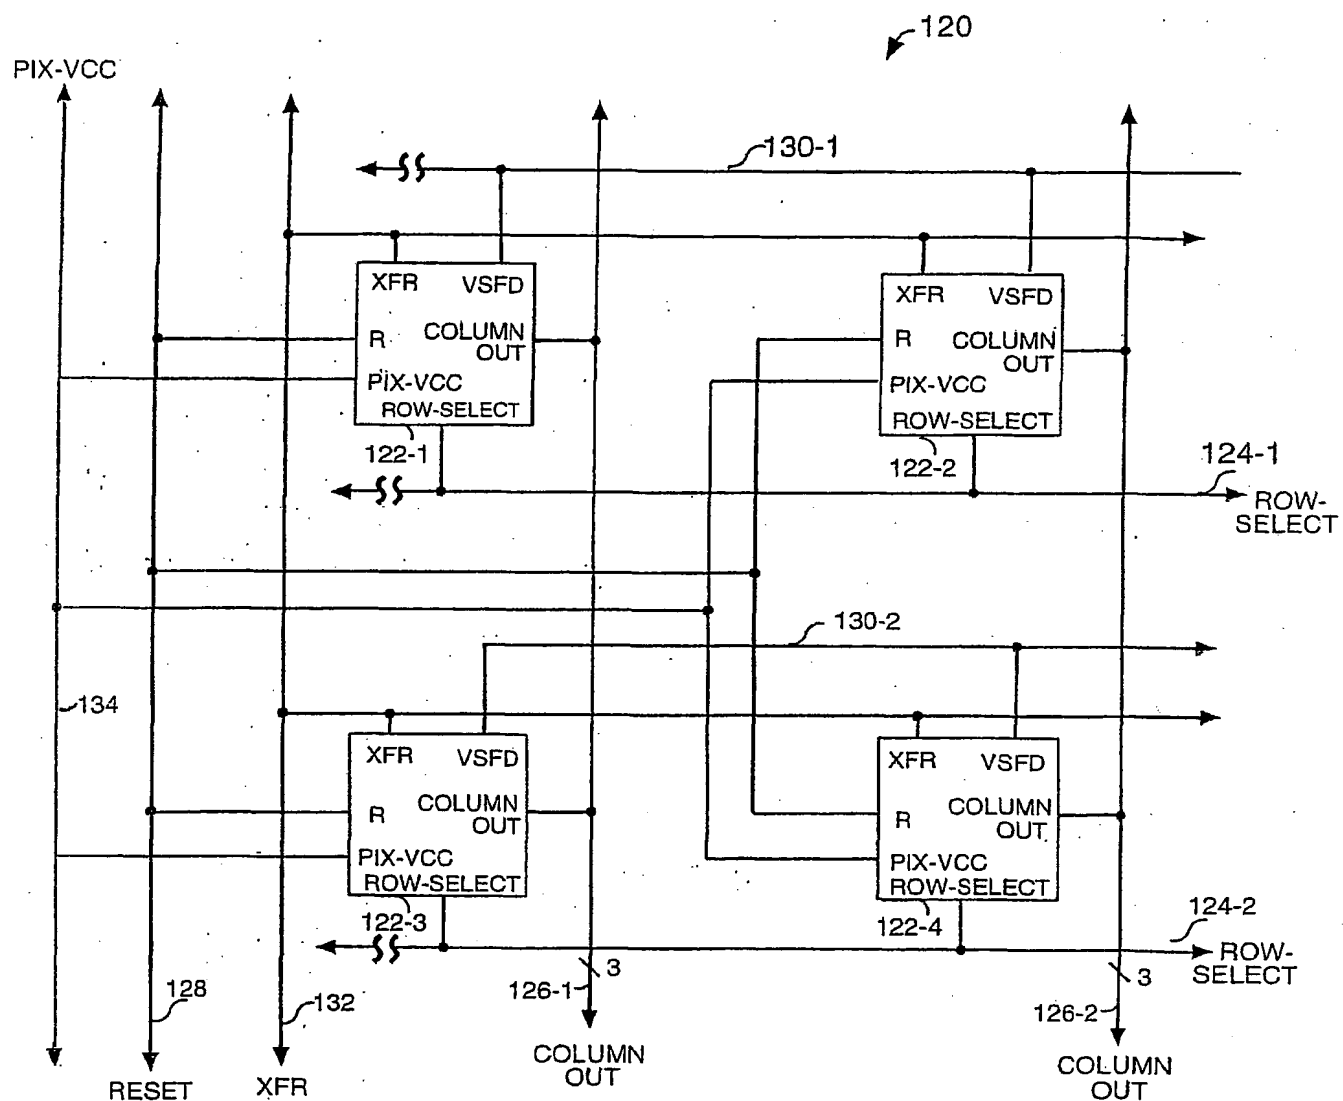


FIG. 5

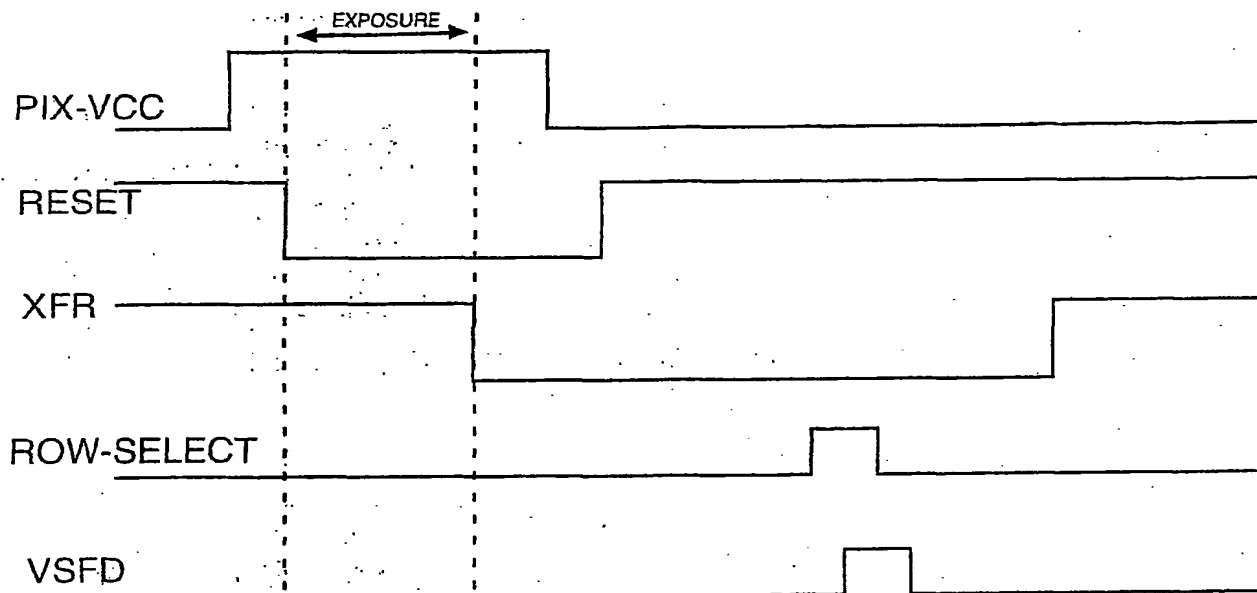


FIG. 6A

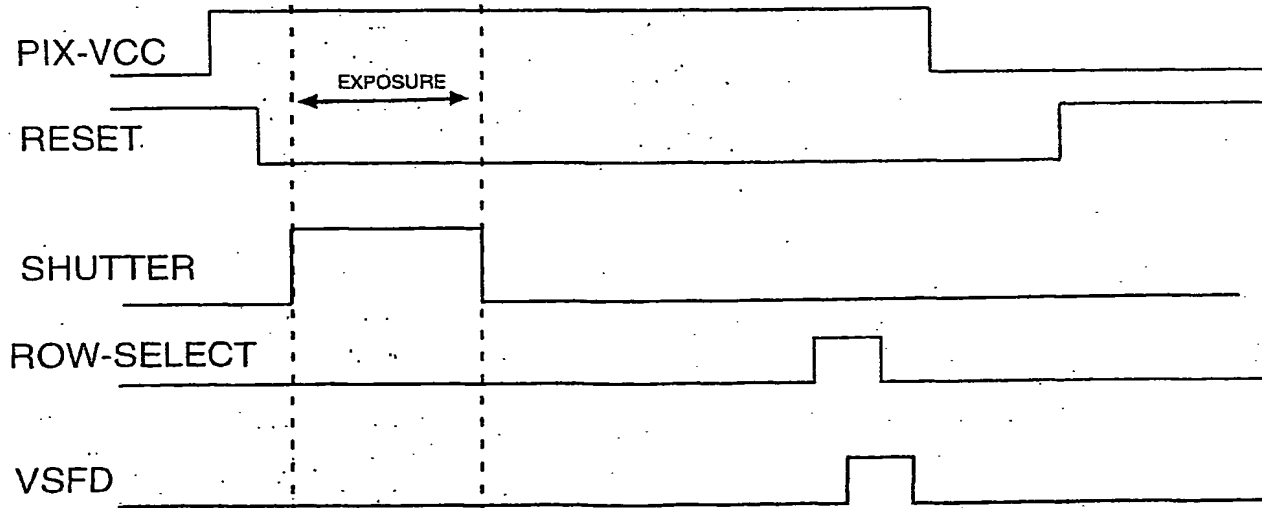


FIG. 6B

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
4 April 2002 (04.04.2002)

PCT

(10) International Publication Number  
**WO 02/027804 A3**

(51) International Patent Classification<sup>7</sup>: **H01L 27/146**

(21) International Application Number: PCT/US01/29488

(22) International Filing Date:  
20 September 2001 (20.09.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/235,249 25 September 2000 (25.09.2000) US  
09/884,863 18 June 2001 (18.06.2001) US

(71) Applicant: **FOVEON, INC.** [US/US]; 2820 San Tomas  
Expressway, Santa Clara, CA 95051-0951 (US).

(72) Inventor: **MERRILL, Richard, B.**; 890 Patrol Road,  
Woodside, CA 95134 (US).

(74) Agents: **D'ALESSANDRO, Kenneth** et al.; Sierra Patent  
Group, Ltd., P.O. Box 6149, Stateline, NV 89449 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

(88) Date of publication of the international search report:  
20 February 2003

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: VERTICAL COLOR FILTER DETECTOR GROUP AND ARRAY

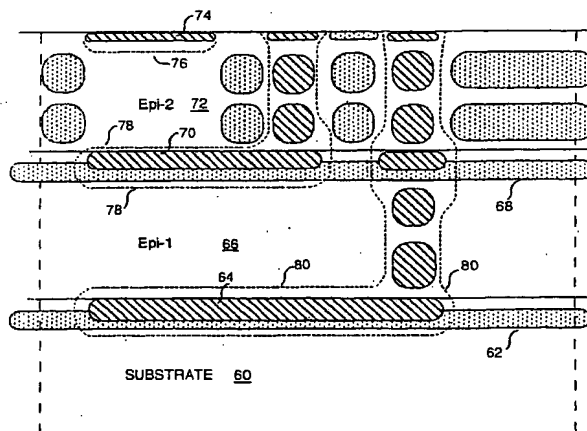

(57) Abstract: A vertical color filter detector group according to the present invention is formed on a semiconductor substrate and comprises at least six layers of alternating p-type and n-typed doped regions. PN junctions between the layers operate as photodiodes with spectral sensitivities that depend on the absorption depth versus wavelength of light in the semiconductor. Alternate layers, preferably the n-type layers, are detector layers to collect photo-generated carriers, while the intervening layers, preferably p-type, are reference layers and are connected in common to a reference potential referred to as ground. Each detector group includes a blue-sensitive detector layer at an n-type layer at the surface of the semiconductor, a green-sensitive detector layer at an n-type layer deeper in the semiconductor, and a red-sensitive detector layer at the n-type layer deepest in the semiconductor. The blue-sensitive detector layer at the surface of the semiconductor may have a reference layer only below it, while the red- and green-sensitive detector layers have reference layers above and below them. Three sets of active pixel sensor circuitry are coupled to the three detector layers, such that three active pixel sensors are formed using the group of three co-located detectors of the vertical color filter detector group.

WO 02/027804 A3

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/29488

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H01L27/146

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 238 760 A (CARR WILLIAM N) 9 December 1980 (1980-12-09) cited in the application figures 1,4,5,9 column 1, line 64 -column 2, line 22 column 2, line 59 -column 3, line 20 column 7, line 30 - line 54	1-9, 13-18, 21-27
Y	PATENT ABSTRACTS OF JAPAN vol. 013, no. 386 (E-812), 25 August 1989 (1989-08-25) -& JP 01 134966 A (FUJI PHOTO FILM CO LTD), 26 May 1989 (1989-05-26) abstract figure 3	1-9, 13-18, 21-27



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

11 November 2002

Date of mailing of the international search report

18/11/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Visscher, E



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/29488

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 965 875 A (MERRILL RICHARD BILLINGS) 12 October 1999 (1999-10-12) cited in the application figure 6 column 4, line 33 -column 5, line 42 -----	1,13,21
A	PATENT ABSTRACTS OF JAPAN vol. 011, no. 011 (E-470), 13 January 1987 (1987-01-13) -& JP 61 187282 A (MITSUBISHI ELECTRIC CORP), 20 August 1986 (1986-08-20) abstract -----	1,13,21

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/29488

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4238760	A	09-12-1980	CA 1138081 A1	21-12-1982
			DE 2940343 A1	10-04-1980
			FR 2438344 A1	30-04-1980
			GB 2034971 A	11-06-1980
			JP 55052277 A	16-04-1980
			NL 7907416 A	09-04-1980
JP 01134966	A	26-05-1989	NONE	
US 5965875	A	12-10-1999	CN 1298483 T	06-06-2001
			EP 1078233 A1	28-02-2001
			JP 2002513145 T	08-05-2002
			TW 407428 B	01-10-2000
			WO 9956097 A1	04-11-1999
JP 61187282	A	20-08-1986	NONE	